


# Kuličkové šrouby SF

(Vyznačené typy skladem)

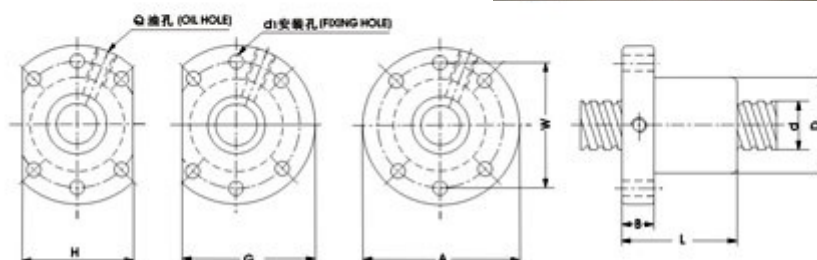

MODEL NO.	MAIN DIMENSIONS					MOUNTING DIMENSION								BASIC LOAD RATING		RIGIDITY(kgf/um) K
	SCREW DIAMETER	THREAD DISTANCE	BALL DIAMETER	NUT OUTER DIAMETER	BALL CIRCULATION NUMBER	Q	A	G	H	L	B	W	d1	C(kgf)	Co(kgf)	
	d	s	Da	D	n											
<b>SF1605</b>	<b>16</b>	<b>5</b>	<b>3.175</b>	<b>28</b>	<b>3</b>	<b>M6</b>	<b>48</b>	<b>44</b>	<b>40</b>	<b>50</b>	<b>10</b>	<b>38</b>	<b>5.5</b>	<b>780</b>	<b>1790</b>	<b>20</b>
<b>SF2005</b>	<b>20</b>	<b>5</b>	<b>3.175</b>	<b>36</b>	<b>3</b>	<b>M6</b>	<b>58</b>	<b>51</b>	<b>44</b>	<b>51</b>	<b>10</b>	<b>47</b>	<b>6.6</b>	<b>1130</b>	<b>2380</b>	<b>25</b>
SF2505	25	5	3.175	40	3	M8	62	55	48	51	10	51	6.6	1280	3110	35
SF3205		5	3.175	50	4	M8	80	71	62	52	12	65	9	1450	4150	40
SF3210	32	10	6.35	50	4	M8	80	71	62	90	12	65	9	3390	7170	40
SF4005		5	3.175	63	4	M8	93	81.5	70	55	14	78	9	1610	5350	49
SF4010	40	10	6.35	63	4	M8	93	81.5	70	93	14	78	9	3910	9520	50
SF5010	50	10	6.35	75	4	M8	110	97.5	85	93	16	93	11	4450	12500	65
SF6310	63	10	6.35	90	4	M8	125	100	95	98	18	108	11	5070	16600	80
SF8010	80	10	6.35	105	4	M8	145	127.5	110	98	20	125	13.5	5620	21300	90